



# 9071 Smart Vibration Meter BNC Cable Accelerometer with Magnet

## BENEFITS

- Built-in ISO Alarms
- Find machine faults before they stop your machine
- Increase productivity and lower maintenance costs

## FEATURES

- Full Color LED Display
- Collect data
- Standard Cable mounted accelerometer with magnet
- ISO built-in Alarms
- Easily identify bearing problems with BDU Reading
- Easily identify problems with built-in band filters:
  - 1X (unbalance)
  - 2X (misalignment)
  - 3X (looseness)
- 800 line FFT (spectrum)
- Ruggedized IP67 case
- 3-year Limited Warranty


## PUT THE TPI 9071 TO WORK:

Commercial & Industrial HVAC  
Food Processing  
Manufacturing  
Mining  
Packaging  
Petrochemical  
Pulp and Paper  
Power Plants  
Utilities  
Automotive

## ANALYZE • INTERPRET • SAVE Vibration analysis at the touch of a button!

TPI 9071 analyzes & interprets readings: ISO machine alarms and BDU reading indicate overall machine and bearing condition; clear picture of 1 X (unbalance) 2X (misalignment) 3X (looseness) machine problems detects imbalance, misalignment and looseness; 800-line spectrum with zoom and cursor to identify complex issues.

Collect and store test data. Storage space of 10 memory blocks with 20 readings per block available. Stored readings can be displayed for analysis.

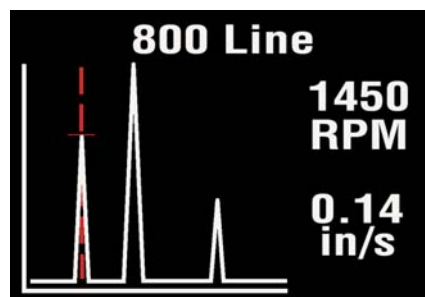



# 9071 Smart Vibration Meter BNC Cable Accelerometer with Magnet

The TPI 9071 is a simple, easy to use, low cost vibration meter. Record, analyze and display vibration signals at the push of a button.

## Overall machine and bearing conditions:


vibration values are displayed with color coded alarm levels for ISO values and Bearing Damage (BDU)



**Easy vibration analysis:**  
clear picture of machine problems detected with built in band filters:  
1X (unbalance)  
2X (misalignment)  
3X (looseness)

## Identify complex issues:

800-line spectrum with zoom and cursor.



- **Size:** H 7.95" W 2.36" 200 mm x 60mm x 26mm
- **Weight:** 9.8oz (280g)(not including magnet)
- **Environmental:**
  - \* **Water:** IP67 Waterproof
  - \* **Operating:** 32°F to 122°F (0°C to 50°C)
  - \* **Storage:** -4°F to 158°F (-20°C to 70°C)
- **Power supply:** 2xAA batteries
- **Battery life:** Approximately 50 hours of normal use
- **Frequency ranges:**
  - 2/10Hz - 1kHz ISO
  - 2Hz - 10kHz Total g
  - 1kHz - 10kHz Bearing Analysis
- **Frequency resolution:** 100 / 800 lines
- **Displayed amplitude units:** Acceleration in g / velocity in inches per second or mm per second / Bearing damage in BDU
- **Displayed frequency units:** Hz, CPM or RPM
- **Input range:** +/- 50 g (with supplied accelerometer)
- **Dynamic range:** 72 dB (0.05g resolution)
- **Auto set up of VA bands**
- **Measurement storage:** 10 blocks / 20 readings per block
- **Accelerometer connection:** BNC connector cable with removable magnet (1mV/g - 10,000mV/g)
- **Reading storage:** 10 blocks/ 20 readings per block
- **Standard accessories:** A9012 IEPE accelerometer with cable, A9073 magnet and A9074 Soft pouch
- **Optional accessories:** A9086 Protective boot with magnets

**Advanced**  
**Back**  
**BDU Settings**  
**Units**  
**Device Settings**

Readings are easily saved and recalled with all alarm levels and settings stored in non-volatile flash memory. Run speed and machine type are entered with the simple to use Setup Wizard.

It really couldn't be any easier to use! Just 2 buttons - take reading and menu Left and right scroll arrows.

**Test Products International, Inc.**  
**Headquarters:**  
9615 SW Allen Blvd.  
Beaverton, OR 97005 USA  
Tel: 503-520-9197  
Fax: 503-520-1225  
e-mail: [info@tpi-thevalueleader.com](mailto:info@tpi-thevalueleader.com)

**Test Products International, Ltd.**  
**Canada**  
Tel: 905-693-8558  
Fax: 905-693-0888  
e-mail: [info@tpicanada.com](mailto:info@tpicanada.com)

**Test Products**  
**International Europe Ltd.**  
Tel: +44 (0) 1293 530196  
Fax: +44 (0)1293 531870  
e-mail: [sales@tpieurope.com](mailto:sales@tpieurope.com)

**TPI Asia Pacific**  
Tel: +82-32-831-3567  
Fax: +82-32-833-3569  
e-mail: [sales@tpiasiapacific.com](mailto:sales@tpiasiapacific.com)